

SWAP TRAILER COURIER MASTER



Offer available only through **your Wielton representative!**

Price:

13.990 Euro net

Contact us:

Phone:


+48 123 456 789

E-mail:

mail@wielton.com.pl

Swap-body trailer starting **from 13 990 EUR**

(basic version)

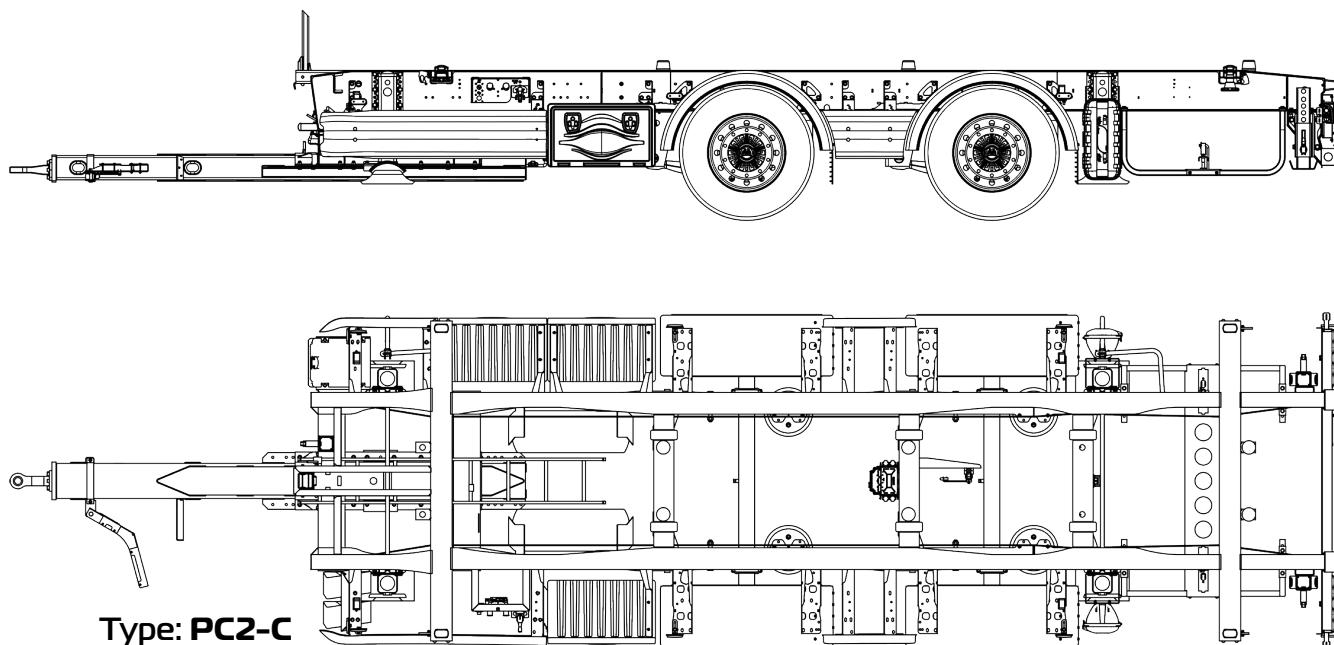

Basic parameters:

Twist-lock spacing – width:
2.259 mm

Twist-lock spacing – length:
5.853 mm

Wheelbase:
1.420 mm

Coupling height:
1.120 - 1.320 mm

Suspension travel:
450 mm

Ride height:
approx. 1.120 mm

Tyres:
385/55 R22,5"

Drawbar eye height:
400 mm

Gross vehicle weight:
18.000 kg

Expand your offer with additional accessories and services.

Choose from the available packages and options:



SPARE Package

- Spare wheel (1 pc)
- Wheel wrench

+ 470 EUR



ADR Package

- Fire-extinguisher box (1 pc)
- Folding ADR plate on rear bumper (1 pc)

+ 100 EUR

Accessories



Pneumatic coupling DUOMATIC

+ 70 EUR



Double spare-wheel carrier

+ 200 EUR



Additional pair of guiding rollers

+ 80 EUR



Suspension stroke limiter
(pick-up height 1120–1220 mm)

+ 0 EUR



Lock key

+ 40 EUR



Water tank (1 pc)

+ 50 EUR



4-year warranty for **299 EUR**

The extended warranty increases your comfort and safety in the event of a breakdown.
It covers all failures and defects not resulting from normal operational wear of the trailer.

TECHNICAL SPECIFICATION – WIELTON EVO SWAP-BODY TRAILER

Chassis / Frame

Frame made of high-strength steel S700, hot-dip galvanized
Container beams equipped with single twist-locks for swap-body fixing
Two pairs of guiding rollers
Adjustable front bumper, adapted to C745 / C782 bodies
Side underrun protection – rail with WIELTON logo
Rear bumper – steel, galvanized

Axles and Suspension

BPW axles – 2 x 9,000 kg, disc brakes
High Suspension travel (450 mm)

Landing legs

Two front and two rear SAF crank-operated landing legs

Tyres

4 x 385/55 R22.5" Hankook, single
No spare wheel

Rims

4 x steel 22.5 x 11.75 ET-120
No spare rim

Brake system

WABCO brake system
Steel air tanks
Brake release function – Bounce Control
HS valve mounted before axles on driver's (left) side
Pneumatic couplings STD – yellow/red

Electrical system

Aspöck 24 V lighting installation
LED work lights controlled by switch on HS console
LED reversing lights, 2 pcs rear (on both sides, behind axles)
LED reversing lights, 2 pcs front (on both sides, before axles)
Central LED reversing light (1 pc before rear container beam)
Wiring routed on the right side. Electrical connector: 1 x 15-pin + EBS

Standard equipment

Full mudguards, compliant with ECE
Side impact guards – steel, ECE-compliant
ECE plates
Two 145 L Aberg toolboxes (mounted on both sides – before axles)
Wheel chocks with holders
Without spare-wheel basket

Safety systems

Tyre Pressure Monitoring System (TPMS) – Aberg Connect

Corrosion protection

Frame hot-dip galvanized

Contour markings

Reflective tape with WIELTON logo

Side: WHITE

Rear: RED

**Certification
/ Homologation**

EU Type Approval

Delivery conditions

Pickup from Wielton S.A. headquarter

Warranty

Manufacturer's Warranty Booklet available at: www.evo.wielton.com

Wielton S.A. also provides 24/7 Assistance service.

In case of breakdown, contact the international emergency hotline:

+48 509 655 955

Service

List of authorized service points available upon request and at www.aberg.com

The customer must perform maintenance according to the Warranty and User Manual.

Personal Data Protection Clause (RODO) for contractors

Please refer to the Privacy Policy available at: <https://evo.wielton.com/polityka-prywatnosci>