WIELTON EVO

SWAP TRAILER
COURIER MASTER

Offer available only through **your Wielton representative!**

Price:

13.990 Euro net

Contact us:

Phone:
+48 660 500 600

E-mail:
info@evo.wielton.com

Swap-body trailer starting from 13 990 EUR

(basic version)

Type: **PC2-C**

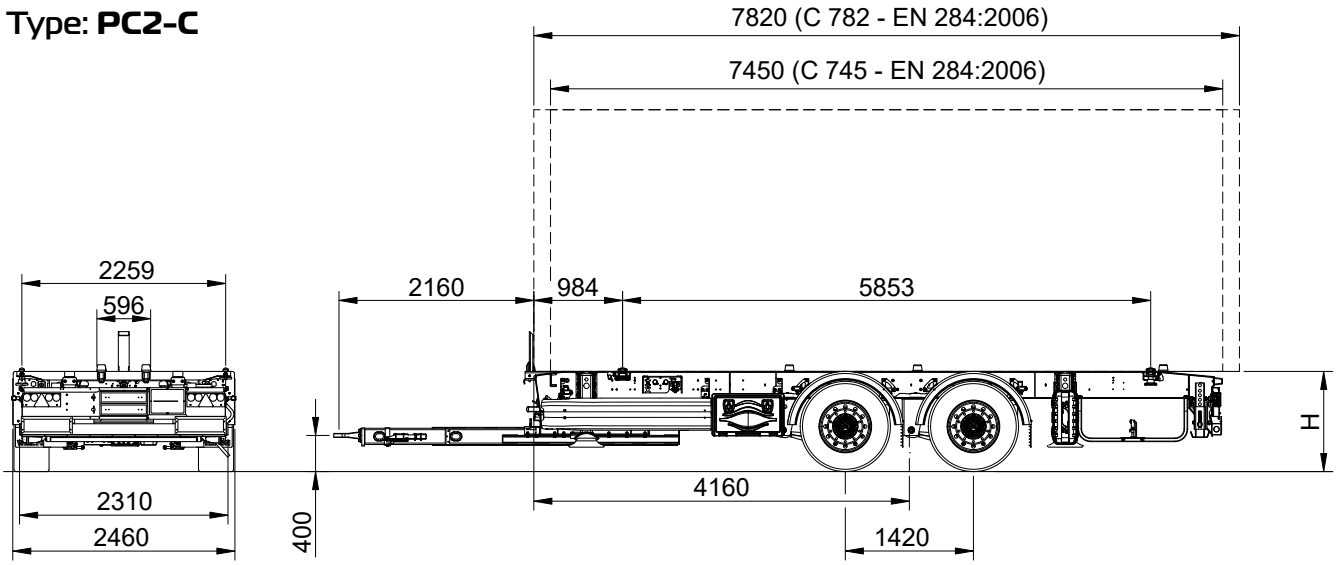

Basic parameters:

Twist-lock spacing – width:
2.259 mm

Twist-lock spacing – length:
5.853 mm

Wheelbase:
1.420 mm

Coupling height:
1.120 - 1.320 mm

Suspension travel:
450 mm

Ride height:
approx. 1.120 mm

Tyres:
385/55 R22,5”

Drawbar eye height:
400 mm

Gross vehicle weight:
18.000 kg

WIELTON EVO

Expand your offer with additional accessories and services.

Choose from the available packages and options:

	SPARE Package - Spare wheel (1 pc) - Wheel wrench	+470 EUR
	ADR Package - Fire-extinguisher box (1 pc) - Folding ADR plate on rear bumper (1 pc)	+100 EUR

Accessories

	Pneumatic coupling DUOMATIC	+70 EUR
	Double spare-wheel carrier	+190 EUR
	Additional pair of guiding rollers	+80 EUR
	Liftable first axle	+850 EUR
	Lock key	+40 EUR
	Water tank (1 pc)	+45 EUR

4-year warranty for 299 EUR

The extended warranty increases your comfort and safety in the event of a breakdown.
It covers all failures and defects not resulting from normal operational wear of the trailer.

TECHNICAL SPECIFICATION – WIELTON EVO SWAP-BODY TRAILER

Chassis / Frame	Frame made of high-strength steel S700, hot-dip galvanized
	Container beams equipped with single twist-locks for swap-body fixing
	Two pairs of guiding rollers
	Adjustable front bumper, adapted to C745 / C782 bodies
	Side underrun protection – rail with WIELTON logo
	Rear bumper – steel, galvanized
Axles and Suspension	BPW axles – 2 × 9,000 kg, disc brakes
	High Suspension travel (450 mm)
Landing legs	Two front and two rear SAF crank-operated landing legs
Tyres	4 × 385/55 R22.5" Hankook, single
	No spare wheel
Rims	4 × steel 22.5 × 11.75 ET-120
	No spare rim
Brake system	WABCO brake system
	Steel air tanks
	Brake release function – Bounce Control
	HS valve mounted before axles on driver's (left) side
	Pneumatic couplings STD – yellow/red
Electrical system	Aspöck 24 V lighting installation
	LED work lights controlled by switch on HS console
	LED reversing lights, 2 pcs rear (on both sides, behind axles)
	LED reversing lights, 2 pcs front (on both sides, before axles)
	Central LED reversing light (1 pc before rear container beam)
	Wiring routed on the right side. Electrical connector: 1 × 15-pin + EBS
Standard equipment	Full mudguards, compliant with ECE
	Side impact guards – steel, ECE-compliant
	ECE plates
	Two 145 L Aberg toolboxes (mounted on both sides – before axles)
	Wheel chocks with holders
	Without spare-wheel basket
Safety systems	Tyre Pressure Monitoring System (TPMS) – Aberg Connect
Corrosion protection	Frame hot-dip galvanized

Contour markings	Reflective tape with WIELTON logo Side: WHITE Rear: RED
Certification / Homologation	EU Type Approval
Delivery conditions	Pickup from Wielton S.A. headquarter
Warranty	Manufacturer's Warranty Booklet available at: www.evo.wielton.com Wielton S.A. also provides 24/7 Assistance service. In case of breakdown, contact the international emergency hotline: +48 509 655 955
Service	List of authorized service points available upon request and at www.aberg.com The customer must perform maintenance according to the Warranty and User Manual.

Personal Data Protection Clause (RODO) for contractors

Please refer to the Privacy Policy available at: https://evo.wielton.com/polityka-prywatnosci